


FLEXLINE SURFACE 4235

NGA4235

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A wall-mounted aluminium profile featuring a 50° beam angle, designed for upward or downward light projection. Its clean, architectural form and concealed mounting system make it ideal for creating linear wall accents in residential or commercial interiors. The profile can also be assembled into custom shapes using 180°, 90°, or 120° joiners, offering added flexibility for creative designs.

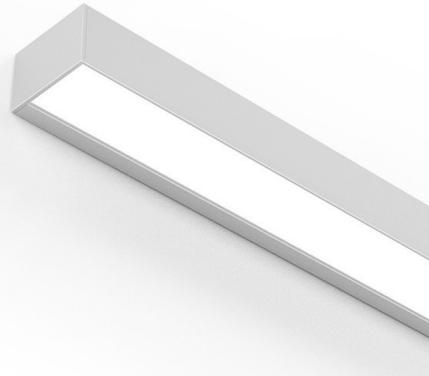

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 60 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 2 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Milky 75%, Frost 89%, Clear 95%.

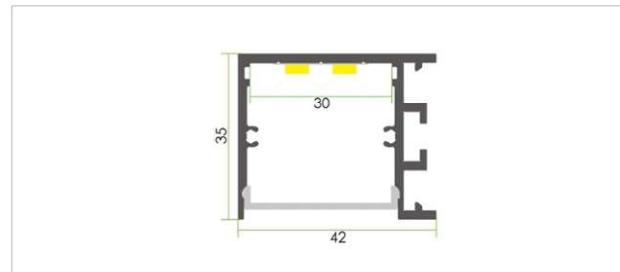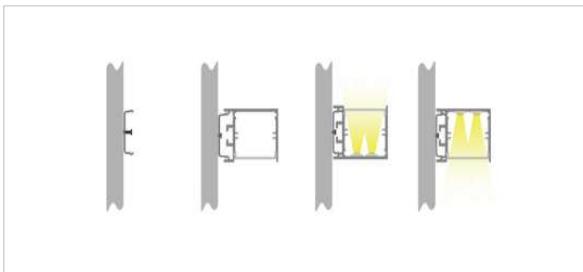

TECHNICAL INFORMATION

Product Code	NGA4235
Product Group	Aluminium Profile
Installation Type	Surface
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 42mm x H 35mm
Weight	0.737 kg/m
Max Power	38.4W/m
Max Strip Width	30mm
Beam Angle	50°
IP Rating	IP20
Accessories	Aluminium endcaps/ Spring clips/ Joiners

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA