

FLEXLINE SURFACE 60

NGA60

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A surface-mounted or suspended aluminium profile with a cylindrical diffuser providing a wide 165° beam angle. Its clean, modern form offers smooth and uniform illumination, making it ideal for use in residential, retail, and commercial environments where a tubular suspended or surface-mounted fixture is desired.



PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 2 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

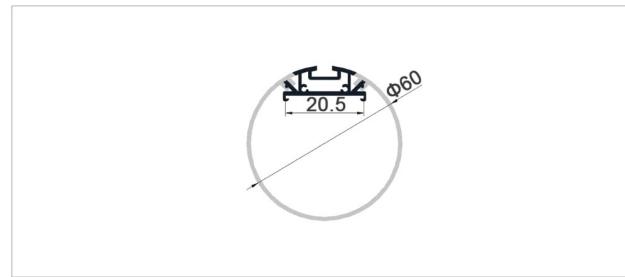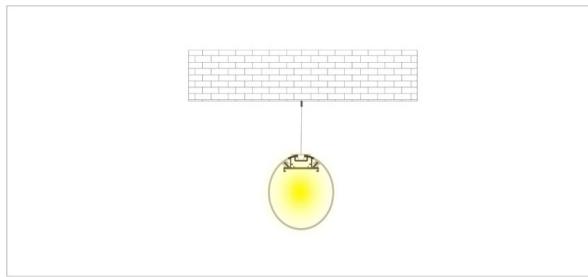

TECHNICAL INFORMATION

Product Code	NGA60
Product Group	Aluminium Profile
Installation Type	Surface or Suspended
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	Ø60mm
Weight	0.65 kg/m
Max Power	30W/m
Max Strip Width	20mm
Beam Angle	165°
IP Rating	IP20
Accessories	Plastic end caps/ Suspension kit

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA