

FLEXLINE SUSPENDED CORNER 3030 R

NGA3030R2

SPECIFICATION SHEET


PRODUCT DESCRIPTION

A suspended corner aluminium profile designed to house LED strips at a 45° angle, delivering focused downward illumination with smooth light distribution. The curved diffuser enhances spread and softens the output for a clean ambient effect. The profile can also be surface mounted when suspension is not required, making it suitable for both general and decorative lighting in interior spaces.



PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

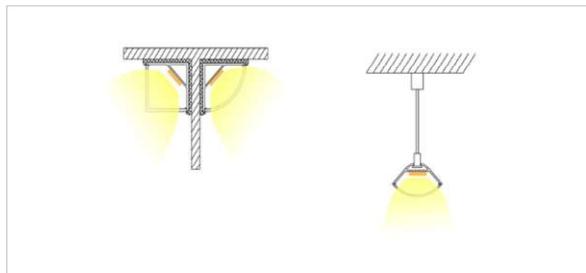

TECHNICAL INFORMATION

Product Code	NGA3030R2
Product Group	Aluminium Profile
Installation Type	Corner
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 29.7 x H 29.7mm
Weight	0.29 kg/m
Max Power	20W/m
Max Strip Width	20mm
Beam Angle	120°
IP Rating	IP20
Accessories	Plastic end caps/ Mounting clips

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA