


FLEXLINE SUSPENDED CORNER 9038

NGA9038

SPECIFICATION SHEET


PRODUCT DESCRIPTION

A suspended corner aluminium profile featuring a 115° beam angle and a flush diffuser for wide, uniform illumination. It can be assembled into custom shapes using 180°, 90°, or 120° joiners, making it ideal for architectural and commercial lighting applications. The profile can also be surface mounted when suspension is not required, making it suitable for both general and decorative lighting in interior spaces.

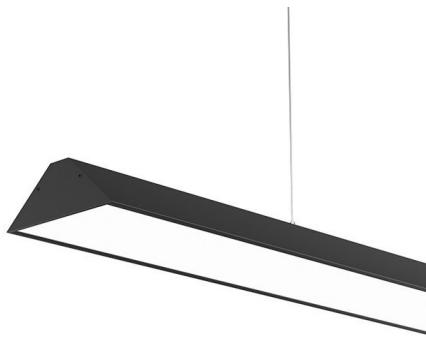

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 60 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 2 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: New Opal 74%.

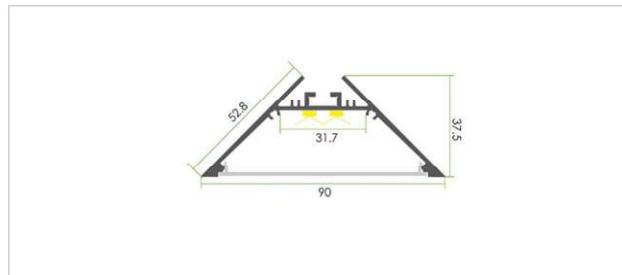

TECHNICAL INFORMATION

Product Code	NGA9038
Product Group	Aluminium Profile
Installation Type	Corner
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	New Opal

Profile Type	Straight
Dimensions	W 90mm x H 37.5mm
Weight	0.938 kg/m
Max Power	57.6W/m
Max Strip Width	31.7mm
Beam Angle	115°
IP Rating	IP20
Accessories	Aluminium endcaps/ Wall clips/ Suspension Kit/ Joiners

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA