


# FLEXLINE TRIMLESS 7534 T

NGA7534T

SPECIFICATION SHEET



## PRODUCT DESCRIPTION

A trimless recessed aluminium profile featuring a 60° beam angle and a deeper LED position for softer, more diffused illumination. Designed for seamless integration into plasterboard ceilings, it can be assembled into custom shapes using 180°, 90°, or 120° joiners—ideal for architectural and commercial spaces requiring a clean, low-glare lighting effect.

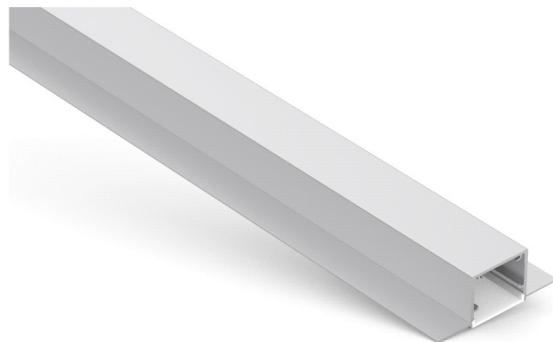

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 180 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, New Opal 74%, Frost 89%, Clear 95%, Black 20%.

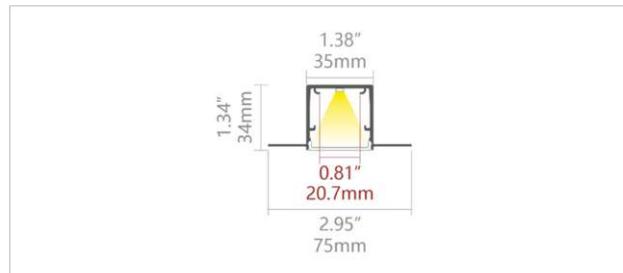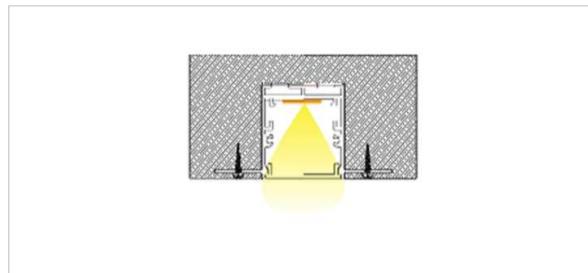

## TECHNICAL INFORMATION

Product Code	NGA7534T
Product Group	Aluminium Profile
Installation Type	Plaster-In
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal / New Opal / Frost / Clear / Black

Profile Type	Straight
Dimensions	W 75mm x H 34mm
Weight	0.643 kg/m
Max Power	28.8W/m
Max Strip Width	21mm
Beam Angle	60°
IP Rating	IP20
Accessories	Aluminium endcaps/ Joiners

## UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: [info@nogreyarea.co.uk](mailto:info@nogreyarea.co.uk)

## MENA REGION HQ

T: +971 (0) 433 38300 | E: [info@nogreyarea.me](mailto:info@nogreyarea.me) | [www.no-grey-area.com](http://www.no-grey-area.com)

NGA