


FLEXLINE TRIMLESS 7534

NGA7534TS1

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A trimless recessed aluminium profile featuring a 60° beam angle and a shallower LED position for brighter illumination. Designed with an integrated reflector insert, it improves light output and visual comfort by reducing glare, while maintaining a clean trimless appearance. Suitable for seamless ceiling integration, it supports custom-shaped configurations using 180°, 90°, or 120° joiners—ideal for retail, hospitality, or residential interiors with a focus on visual impact.

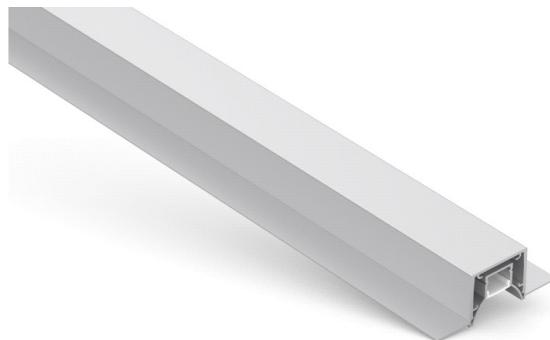

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 180 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%, Milky 75%, Frost 89%, Clear 95%, Black 20%.

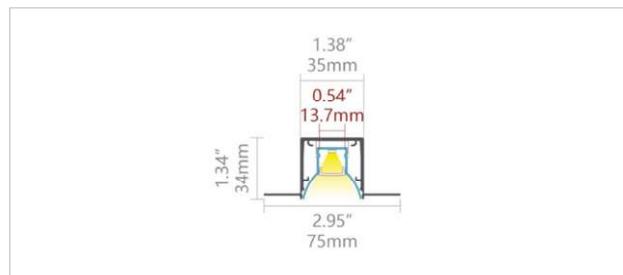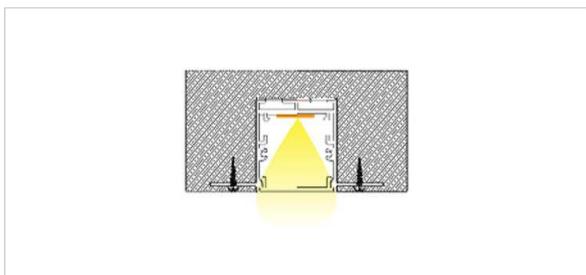

TECHNICAL INFORMATION

Product Code	NGA7534TS1
Product Group	Aluminium Profile
Installation Type	Plaster-In
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PMMA
Diffuser Options	Opal / Milky / Frost / Clear / Black

Profile Type	Straight
Dimensions	W 75mm x H 34mm
Weight	0.776 kg/m
Max Power	14.4W/m
Max Strip Width	13mm
Beam Angle	60°
IP Rating	IP20
Accessories	Aluminium endcaps/ Joiners

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA