

FLEXLINE WALKOVER 3030 IP67

NGA3030W



SPECIFICATION SHEET

PRODUCT DESCRIPTION

A recessed aluminium profile with IP67 and IK10 ratings, designed for in-ground and wall applications requiring durability and moisture resistance. IP68 protection is achievable with additional accessories. Its impact-resistant build and 80° beam angle make it suitable for tiled flooring and walls, garden paths, pedestrian walkways, and architectural uplighting, as well as durable recessed lighting in offices, furniture, and exhibition settings.

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%.

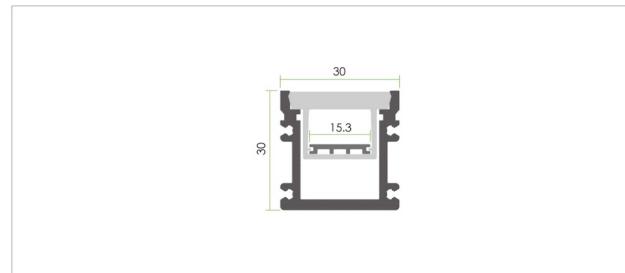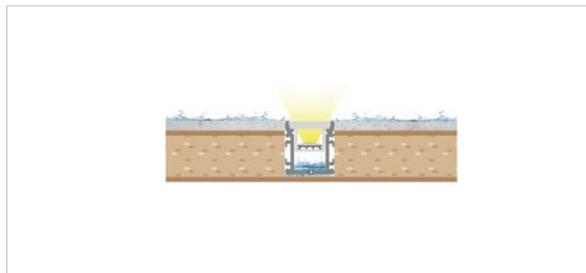

TECHNICAL INFORMATION

Product Code	NGA3030W
Product Group	Aluminium Profile
Installation Type	Walkover
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal

Profile Type	Straight
Dimensions	W 30mm x H 30mm
Weight	0.907 kg/m
Max Power	19.2W/m
Max Strip Width	15mm
Beam Angle	80°
IP Rating	IP67
Accessories	Aluminium endcaps/ IP endcap

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA