


FLEXLINE WALKOVER 7965 IP68

NGA7965W

SPECIFICATION SHEET



PRODUCT DESCRIPTION

A recessed aluminium profile with IP68 and IK10 ratings, engineered for high-strength in-ground lighting in demanding environments. Compatible with optional glass diffuser and stainless steel side bar accessories, it offers enhanced durability and a clean architectural finish. With an 80° beam angle, it's ideal for landscape architecture, road markings, bridges, and building facades in outdoor decorative or project-based installations.

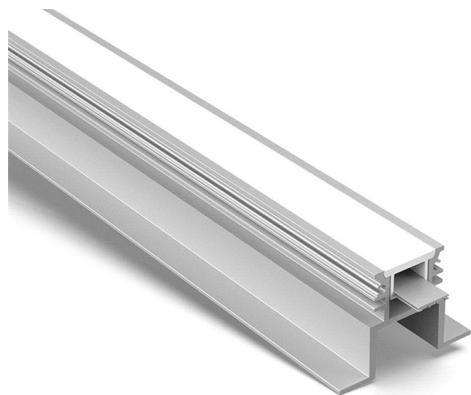

PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Opal 63%.

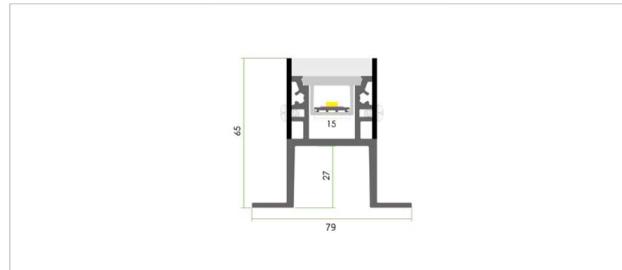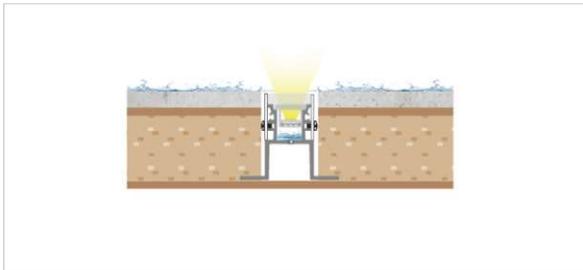

TECHNICAL INFORMATION

Product Code	NGA7965W
Product Group	Aluminium Profile
Installation Type	Walkover
Light Distribution	Direct
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal

Profile Type	Straight
Dimensions	W 79mm x H 65mm
Weight	3.797 kg/m
Max Power	19.2W/m
Max Strip Width	15mm
Beam Angle	80°
IP Rating	IP68
Accessories	Aluminium endcaps/ IP endcaps/ Stainless steel side bar/ IP cable gland/ Glass diffuser

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA