

# FLEXLINE PLASTER-IN 13352

NGA13352



SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A plaster-in aluminium profile featuring a full semi-circular form for recessed installation into plasterboard ceilings. Its curved structure supports dual light sources, producing broad, diffused illumination with a flush, frameless finish. Ideal for architectural applications in residential and commercial interiors where sculptural, built-in lighting is desired.

## PRODUCT NOTES

- When selecting an LED strip for this profile, we recommend a minimum LED density of 120 LEDs/m to achieve homogeneous, dot-free illumination, depending on diffuser type.
- A minimum of 1 LED strip runs per metre is recommended to ensure uniform light distribution and eliminate shadowing.
- Diffuser light transmittance: Milky 65–70%, Opal 75%, Frost 85–90%, Clear 95%.

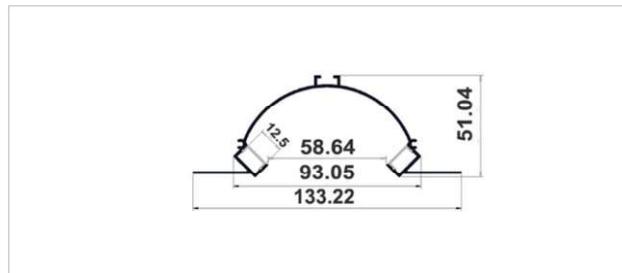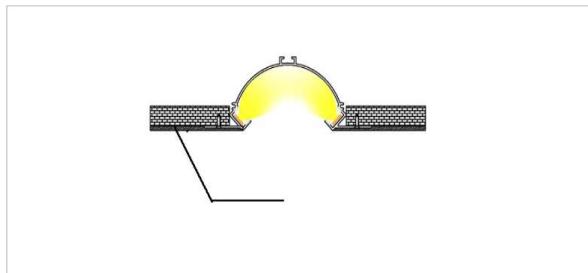

## TECHNICAL INFORMATION

Product Code	NGA13352
Product Group	Aluminium Profile
Installation Type	Plaster-In
Light Distribution	Indirect / Reflective
Profile Material	6063-T5 Anodised Aluminium
Profile Finish	Silver / Black / White / Custom
Diffuser Material	PC
Diffuser Options	Opal / Milky / Frost / Clear

Profile Type	Straight
Dimensions	W 133.22 x H 51.04mm
Weight	1 kg/m
Max Power	20W/m
Max Strip Width	12mm
Beam Angle	120°
IP Rating	IP20
Accessories	Aluminium end caps

## UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

## MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA