

FUSION FLEX RGB 26W/M

NGA/LL/RGB/1/120/26/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex RGB 26w per metre LED strip.



PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.

PRODUCT CODE BUILDER

Please specify the IP rating with your enquiry.

E.g., NGA/LL/RGB/1/120/26/20

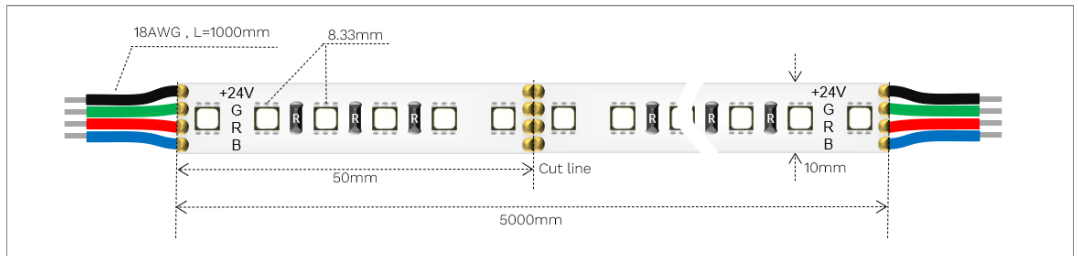

TECHNICAL INFORMATION

Product Code	NGA/LL/RGB/1/120/26/IP
Product Group	LED Strip
Power Consumption	26w/m
Supply Voltage	DC24V
LEDs per metre	120
Cutting Interval	50mm
LED Pitch	8.33mm
Cable Gauge	18 AWG

Height	1.7mm
Type	Constant Voltage
Efficacy	28.8lm/w (@ MAX)
IP Rating Options	IP20 / IP66/ IP68
CRI	N/A
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Lifetime	50.000 hours at L80

Colour Temperature	RED	GREEN	BLUE	MAX	-
Lumen Output	190lm	450lm	110lm	750lm	-

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	10mm	-	10mm	-	12.5mm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA