

FUSION FLEX RGBW 19.2W/M

NGA/LL/RGBW/1/60/19.2/W-3000/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex RGBW 19.2w per metre LED strip.



PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request. The white element is supplied as 3000k as standard but other colour temperatures are available upon request.

PRODUCT CODE BUILDER

Please specify the IP rating with your enquiry.

E.g., NGA/LL/RGBW/1/60/19.2/W-3000/20

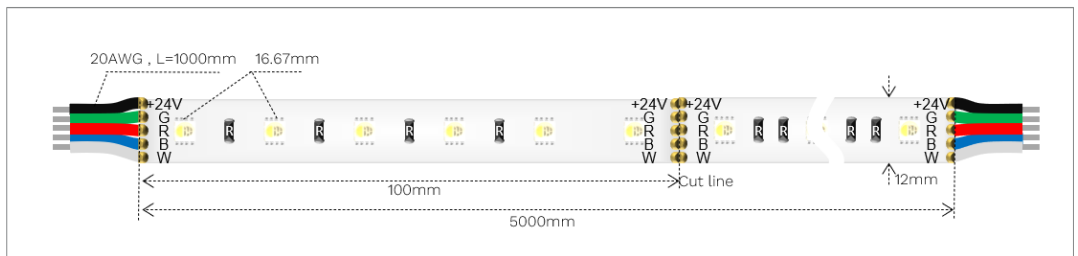

TECHNICAL INFORMATION

Product Code	NGA/LL/RGBW/1/60/19.2/W-3000/IP
Product Group	LED Strip
Power Consumption	19.2w/m
Supply Voltage	DC24V
LEDs per metre	60
Cutting Interval	100mm
LED Pitch	16.67mm
Cable Gauge	20 AWG

Height	1.7mm
Type	Constant Voltage
Efficacy	47.1lm/w (@ MAX)
IP Rating Options	IP20 / IP65 / IP66 / IP67 / IP68
CRI	Ra ≥ 90
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Lifetime	50.000 hours at L80

Colour Temperature	RED	GREEN	BLUE	WHITE	MAX
Lumen Output	140lm	320lm	65lm	380lm	905lm

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	12mm	-	12mm	14.5mm	14.5mm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA