

FUSION FLEX SIDE EMITTING 10W/M

NGA/LL/SE/1/120/10/XXXX/IP

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Fusion Flex Side Emitting 10w per metre LED strip.



PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.

PRODUCT CODE BUILDER

Please specify white colour temperature and the IP rating with your enquiry.

E.g., NGA/LL/SE/1/120/10/4000/68

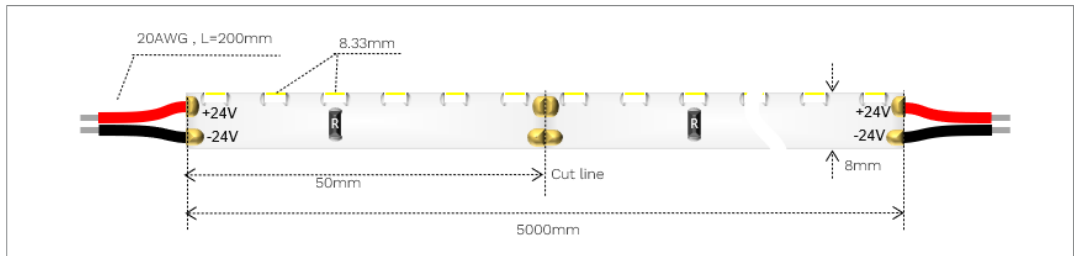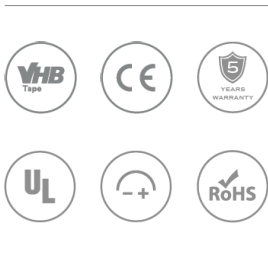

TECHNICAL INFORMATION

Product Code	NGA/LL/SE/1/120/10/XXXX/IP
Product Group	LED Strip
Power Consumption	10w/m
Supply Voltage	DC24V
LEDs per metre	120
Cutting Interval	50mm
LED Pitch	8.33mm
Cable Gauge	20 AWG

Height	1.7mm
Type	Constant Voltage
Efficacy	80lm/w (@ 4000k)
IP Rating Options	IP20 / IP65 / IP66 / IP67 / IP68
CRI	Ra ≥90
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Lifetime	50.000 hours at L80

Colour Temperature	-	-	4000k	-	-
Lumen Output	-	-	800lm	-	-

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	8mm	-	8mm	10.5mm	10.5mm

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA