

# FUSION FLEX ZEDLED 9.6W/M

NGA/LL/ZL/9.6/XXXX/20

LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

Fusion Flex ZEDLED 9.6w per meter LED strip.


## PRODUCT NOTES

Fusion Flex LED strip is supplied in 5m reels with a 1m tail at each end as standard. NGA recommends all LED strip is used in conjunction with appropriate aluminium heat sink for heat dissipation. For a homogenous appearance, please select aluminium profile with a depth greater than the LED pitch. Custom cut LED fixtures are available upon request.

## PRODUCT CODE BUILDER

Please specify white colour temperature and the IP rating with your enquiry.

E.g., NGA/LL/ZL/9.6/4000/20

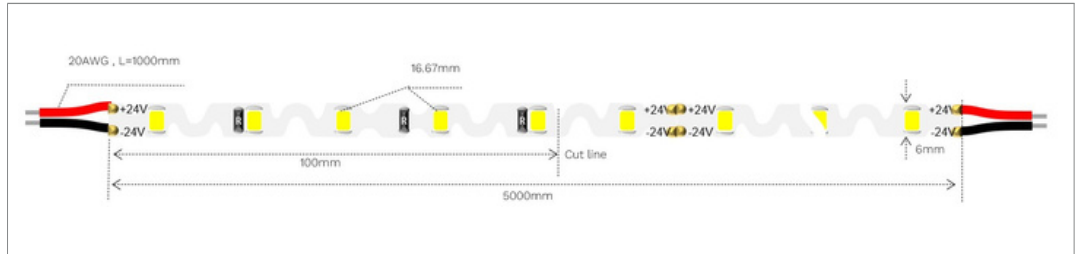

## TECHNICAL INFORMATION

Product Code	NGA/LL/ZL/9.6/XXXX/20
Product Group	LED Strip
Power Consumption	9.6w/m
Supply Voltage	DC24V
LEDs per metre	60
Cutting Interval	100mm
LED Pitch	16.67mm
Cable Gauge	20 AWG

Height	1.7mm
Type	Constant Voltage
Efficacy	83.3lm/w (@ 4000k)
IP Rating Options	IP20 / IP66
CRI	Ra ≥ 90
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Lifetime	50,000 hours at L80

Colour Temperature	-	-	4000k	-	--
Lumen Output	-	-	800lm	-	

IP Rating	IP20	IP65	IP66	IP67	IP68
Width	6mm	-	-	-	-

### HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

### MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

