

FUSION NEON 0612H RGB 8W/M IP68

NGA/LL/NF/0612/H/8/RGB/68/EE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Horizontal Bend 8w IP68 RGB Fusion Neon



PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.

PRODUCT CODE BUILDER

N/A

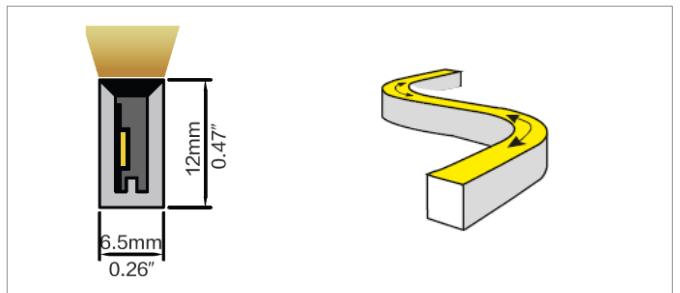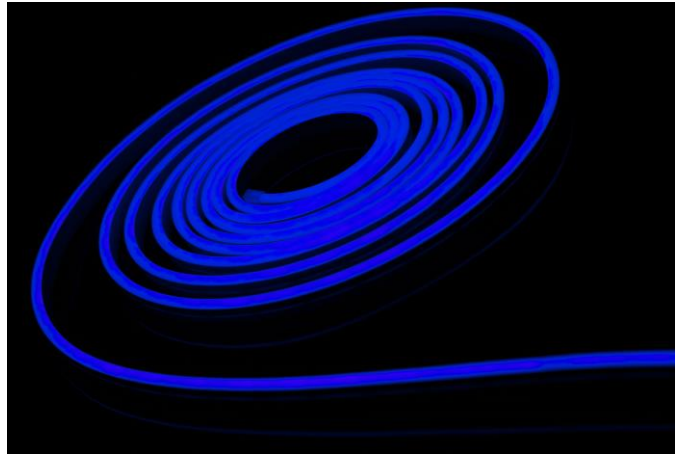

TECHNICAL DATA

Product Code	NGA/LL/NF/0612/H/8/RGB/68/EE
Light Fixture Type	Horizontal Bending Fusion Neon
Cable Entry (EE)	End cable entry only
Cutting Interval	50mm
Dimensions	W:6.5 x H:12mm
IP Rating	IP68
Bending Diameter	60mm Max
Efficacy	18lm/w

Power	8w/m
IK Rating	N/A
Supply Voltage	24V DC
CRI	N/A
Warranty	5 years (3 years when submerged)
MacAdam Step	2SDCM
Control Gear	0-10 / DALI / DMX
Mounting Clip Dims	15 x 8.1 x 10.3mm (L x W x H)

Colour Temperature	Red	Green	Blue	RGB	-
Lumen Output	32lm	93lm	20lm	142	-

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY




End Cable Entry

MOUNTING ACCESSORIES




Mounting Clips: 15 x 8.1 x 10.3mm

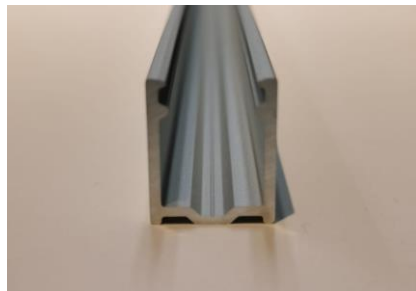


Aluminium Profile: 1000 x 8.9 x 13.2mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

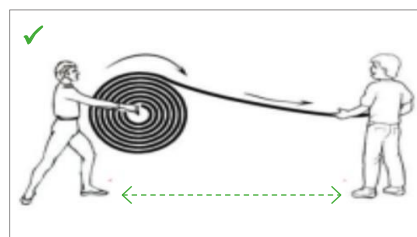

Distance <1.5m

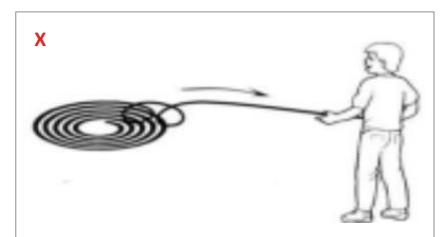

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com