

FUSION NEON 1617H 13.5W/M IP67

NGA/LL/NF/1617/H/13.5/XXXX/67/CE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

Horizontal bend 13.5w IP67 Fusion Neon

PRODUCT NOTES

Fusion Neon is typically supplied in custom cut lengths but is also available in 5m reels with a cable at each end.

The product is supplied with 5 mounting clips per metre as standard or is available with an aluminium mounting channel upon request.


PRODUCT CODE BUILDER

Specify colour temperature with your enquiry.

XXXX = Colour Temperature

CE = Cable Entry

E.g. NGA/LL/NF/1617/H/13.5/3500/67/RE

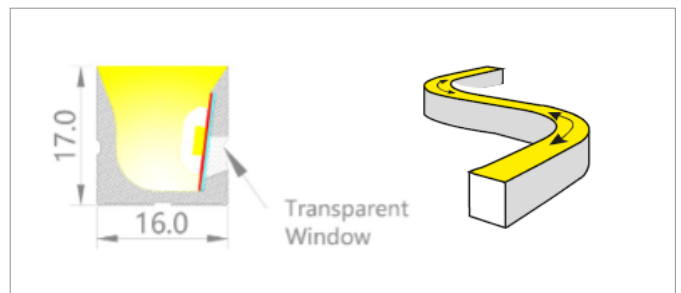

TECHNICAL DATA

Product Code	NGA/LL/NF/1617/H/13.5/XXXX/67/CE
Light Fixture Type	Horizontal Bending Fusion Neon
Cable Entry	End / Rear / Side L / Side R
Cutting Interval	62.5mm
Dimensions	W:16 x H:17mm
IP Rating	IP67
Bending Diameter	300mm
Efficacy	80lm/w (4000k)

Power	13.5w/m
IK Rating	IK08
Supply Voltage	24V DC
CRI	≥90
Warranty	5 years
MacAdam Step	2SDCM
Control Gear	On/Off / Mains / 0-10 / DALI / DMX
Mounting Clip Dims	35 x 20 x 21mm (L x W x H)

Colour Temperature	2700k	3000k	4000k	6000k	
Lumen Output	1010lm	1020lm	1080lm	1070lm	

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA

CABLE ENTRY



End Cable Entry (EE)



Side Cable Entry (SE)




Rear Cable Entry (RE)

MOUNTING ACCESSORIES




Mounting Clips: 35 x 20 x 21mm




Aluminium Profile: 1000 x 20x 21mm

UNREELING

When unreeling NGA's Neon Flex there must be at least 2 people working together. One holding / supporting the reel and the other pulling the neon out for installation. This can avoid twisting the internal LED and damaging it.

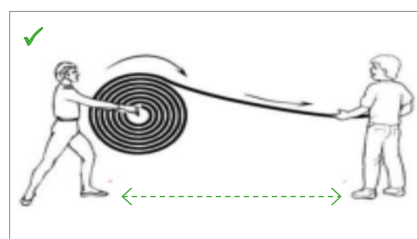

Distance <1.5m

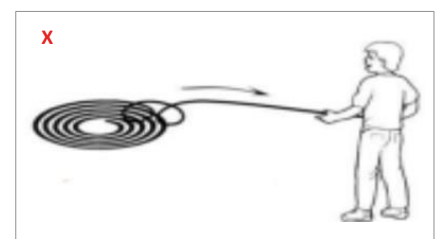

Do not twist

HEAD OFFICE

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com