FUSION FLEX 32.4W/M 2400K IP67

NGA/LL/HP/1/180/32.4/2400/67

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION

A High Output LED Strip, designed to provide high quality illumination for a range of applications.

PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.




















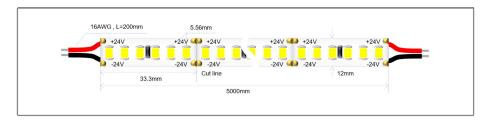

TECHNICAL INFORMATION

| Product Code | NGA/LL/HP/1/180/32.4/2400/67 |
|--------------------|------------------------------|
| Product Group | LED Strip |
| Power Consumption | 32.4w/m |
| Supply Voltage | 24V DC |
| Туре | Constant Voltage |
| Lumen Output | 2764 |
| Efficacy | 85lm/w |
| Colour Temperature | 2400K |
| CRI | Ra≥90 |
| MacAdam Step | <3SDCM |
| Lifetime | L80 50,000Hrs |

| LEDs Per Meter | 180 led/m |
|-----------------------|-----------------------------------|
| Cutting Interval | 33mm |
| LED Pitch | 5.6mm |
| Height | 4.5mm |
| Width | 12mm |
| Max Run Length | 2.5m |
| Control Gear | On/Off/ Mains / 0-10 / DALI / DMX |
| IP Rating | IP67 |
| Operating Temperature | -25 to 60°C |
| Beam Angle | 120° |
| Classification | 3 |

UK & EUROPE HQ

T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

