

# FUSION FLEX DYN PIXEL 19W/M IP66

NGA/LL/DYNP/1/6060/19/21-65/66



LED SPECIFICATION SHEET

## PRODUCT DESCRIPTION

A Medium Output, Dynamic White, Pixel LED Strip. Featuring DMX512 control to seamlessly transition between warm and cool whites, this dynamic pixel strip offers exceptional performance and versatility for professional lighting projects.

## PRODUCT NOTES

- For optimal thermal performance, pair this LED strip with a suitable aluminium heat sink.
- To achieve a more homogeneous light output, use a profile with greater depth than the LED pitch. NGA profiles are recommended for best results.
- Custom-cut fixtures are available upon request to meet specific project requirements.

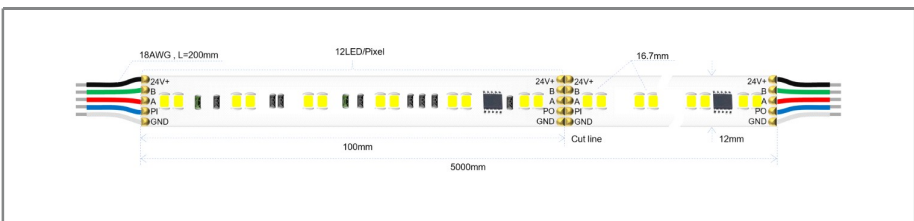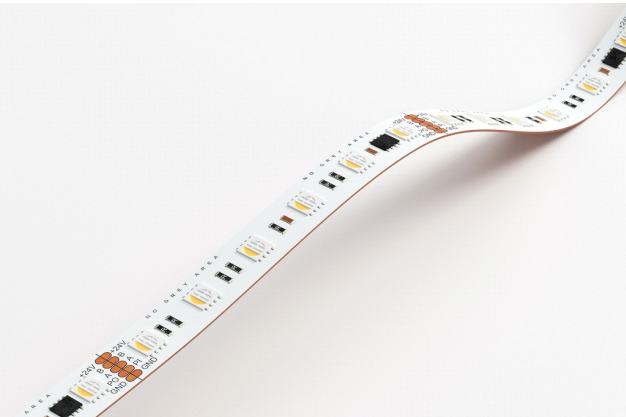

## TECHNICAL INFORMATION

Product Code	NGA/LL/DYNP/1/6060/19/21-65/66
Product Group	LED Strip
Power Consumption	19w/m
Supply Voltage	24V DC
Type	Constant Voltage
Lumen Output	21K:586 65K:820 MAX:1560
Efficacy	82lm/w
Colour Temperature	2100K - 6500K
CRI	Ra≥90
MacAdam Step	<3SDCM
Lifetime	50,000Hrs

LEDs Per Meter	60+60 led/m
Cutting Interval	100mm
LED Pitch	16.67mm
Height	2.2mm
Width	12mm
Max Run Length	5m
Control Gear	DMX
IP Rating	IP66
Operating Temperature	-40 to 55°C
Beam Angle	120°
Classification	3

**UK & EUROPE HQ**  
T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

**MENA REGION HQ**  
T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA